




IS 010702 Eng

**OPERATING INSTRUCTIONS FOR "CF 13" (3 WHEEL)
COMBINATION LOCK**

OPERATING INSTRUCTIONS FOR "CF" (3 WHEEL) COMBINATION LOCK


WARNING

- the mechanical combination lock has to be operated carefully both in opening, closing as well as changing the personal code.
- the lock shall not be lubricated and shall never be dismantled
- when a new code is set, try it at least three times with opened door
- turn the dial slowly and steadily without turning it back

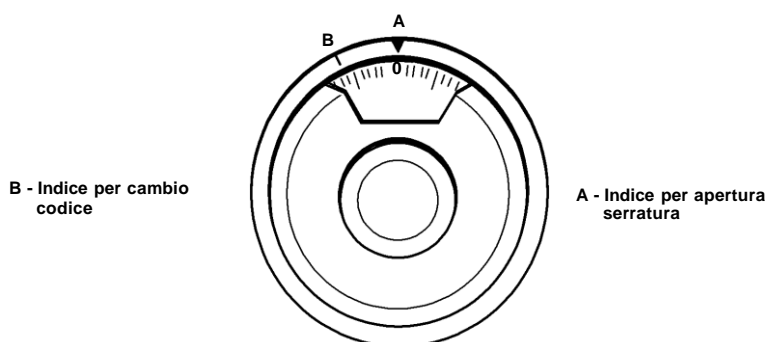

1. HOW TO OPEN THE LOCK WHEN THE SAFE IS DELIVERED

- a) the lock is factory's set on code 25
- b) turn numbered dial to the left (anti clockwise) stopping when the number 25 is aligned with the vertical index – A – the fourth time
- c) turn the dial to the right (clockwise) until it stops; you will hear a light "click".
THE COMBINATION LOCK IS NOW OPEN




2. HOW TO SET A NEW COMBINATION

- a) open the door on which the lock is applied
- b) by keeping the door opened go on with locking operations so that bolts will be in the out position (thrown)
- c) dial the existing combination (see paragraph 1b) but operate on lateral changing **index B** and not index A
- d) insert changing key into the hole positioned on the back of the door; insert it until the wing is entirely inside the lock and turn key toward the direction shown by the arrow on the sticker
THE LOCK IS NOW FREED
- e) set your new combination, selecting **three numbers** of your own choosing and carry out operations as described in paragraph 4a) 4b) 4c) but aligning the numbers on the changing lateral **index B**. **DO NOT USE NUMBERS BETWEEN 0 AND 20 FOR YOUR LAST NUMBER**
- f) turn changing key in the direction contrary to the previous one and then take it out
THE NEW COMBINATION IS NOW SET
- g) **before closing the door try the new combination at least three time, using the opening index – A – (as described in paragraph 4)**
THE DOOR MUST STAY OPEN DURING THIS TEST




3. HOW TO SCRAMBLE THE LOCK

- 3.a) turn the dial to the left (anti clockwise) for at least five revolution



4. HOW TO OPEN THE LOCK

- 4.a) turn numbered dial to the left (anti clockwise) stopping when the first of the three numbers is aligned with the vertical index – A – the fourth time
 4.b) turn numbered dial to the right (clockwise) stopping when the second of the three numbers is aligned with the vertical index – A – the third time
 4.c) turn numbered dial to the left (anti clockwise) stopping when the third and last of the three numbers is aligned with the vertical index – A – the second time
 4.d) turn the dial to the right (clockwise) until it stops; you will hear a light “click”.
 THE LOCK IS NOW OPEN.

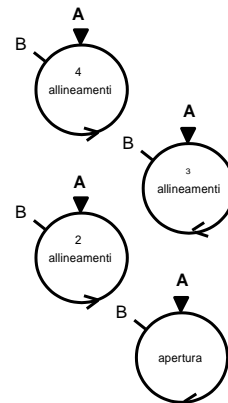

5. HOW TO CHANGE A COMBINATION

- 5.a) open the door on which the lock is applied
 5.b) by keeping the door opened go on with locking operations so that bolts will be in the out position (thrown)
 5.c) dial the existing combination but operate on lateral changing **index B** and not index A, carry out operations as described in paragraph 4a) 4b) 4c)
 5.d) insert changing key into the hole positioned on the back of the door; insert it until the wing is entirely inside the lock and turn key toward the direction shown by the arrow on the sticker
 THE LOCK IS NOW FREED
 5.e) set your new combination, selecting **three numbers** of your own choosing and carry out operations as described in paragraph 4a) 4b) 4c) but aligning the numbers on the changing lateral **index B**. **DO NOT USE NUMBERS BETWEEN 0 AND 20 FOR YOUR LAST NUMBER**
 5.f) turn changing key in the direction contrary to the previous one and then take it out
 THE NEW COMBINATION IS NOW SET
 5.g) **before closing the door try the new combination at least three time, using the opening index – A – THE DOOR MUST STAY OPEN DURING THIS TEST**

